

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number
WO 2004/010018 A1

(51) International Patent Classification⁷: **F16D 3/42, 3/78**

Stephen, Charles [GB/GB]; 26 Withy Close, Romsey,
Hants SO51 7SA (GB).

(21) International Application Number:

PCT/EP2002/008115

(74) Agents: NEUMANN, Ernst, D. et al.; Harwardt Neu-
mann, Brandstrasse 10, 53721 Siegburg (DE).

(22) International Filing Date: 20 July 2002 (20.07.2002)

(81) Designated States (*national*): AT, AU, BR, CN, ES, GB,
IN, JP, KR, MX, PL, SE, US.

(25) Filing Language:

English

(26) Publication Language:

English

(84) Designated States (*regional*): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT,
LU, MC, NL, PT, SE, SK, TR).

(71) Applicant (*for all designated States except US*): GKN AU-
TOMOTIVE GMBH [DE/DE]; Hauptstrasse 150, 53797
Lohmar (DE).

Published:


— with international search report

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): BARTLETT,

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: FLEXIBLE COUPLING

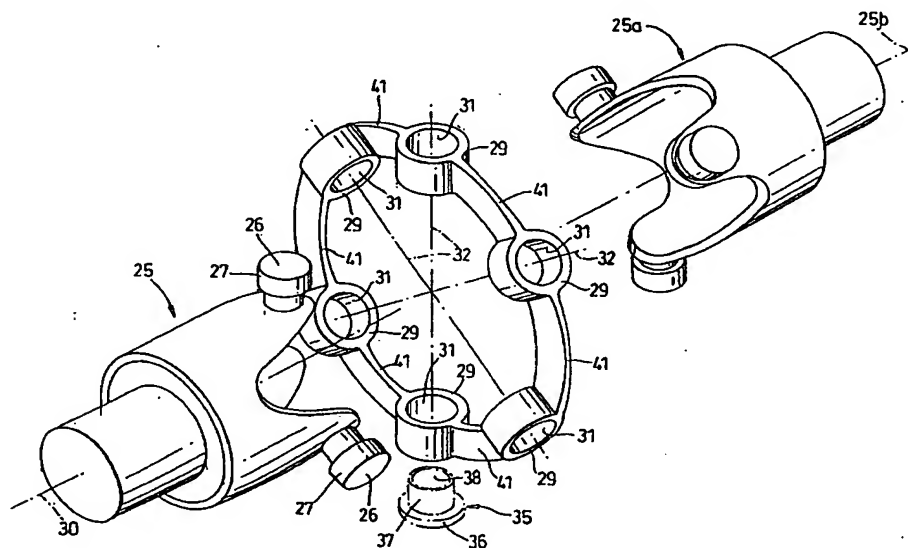

(57) Abstract: A flexible coupling capable of transmitting moments and comprising a first member having a longitudinal axis (30) connected by at least three joints (27) to a second member (41) having a longitudinal axis substantially aligned with the longitudinal axis of the first member, the joints being circumferentially spaced apart about said axis, each joint comprising a first part (29) on one of the members and a second part (31) on the other member, the parts of each joint interfitting so that moments can be transmitted between said members by the joints and so that relative sliding and rotational movement can take place between the parts of each joint, the joint parts on at least one of the members being flexibly arranged (41) so that the members may articulate relative to one another.

WO 2004/010018 A1